



PRODUCT DATA SHEET

DURATAC® TACTILE INDICATORS POLYMERIC HAZARD FLOOR TILES



DESCRIPTION

- 300 x 300mm
- High quality UV stable polymer with self-adhesive backing
- Excellent durability and virtually no maintenance
- Bevelled edges to minimise tripping hazards
- Suitable for interior and exterior applications

CODE

TGSI-H3030 (colour codes below)

WARRANTY

5 Years

SPECIFICATIONS

Slip Rating: P4

Luminance Contrast:	Beige	LRV: Dry 63.4, Wet 63.5
	Black	LRV: Dry 3.05, Wet 2.76
	Blue	LRV: Dry 8.17, Wet 7.36
	Grey	LRV: Dry 43.41, Wet 42.56
	Red	LRV: Dry 12.63, Wet 12.44
	White	LRV: Dry 86.09, Wet 85.6
	Yellow	LRV: Dry 66.51, Wet 65.71


SUITABLE SUBSTRATES

Natural Stone (Granite, Marble Sandstone, Slate, Blue Stone, Basalt & more)
 Engineering Stone (Caesar Stone, Quantum Stone & more)
 Concrete, Asphalt
 Timber/Rubber Vinyl Flooring
 Ceramic

COLOURS



PROFILE

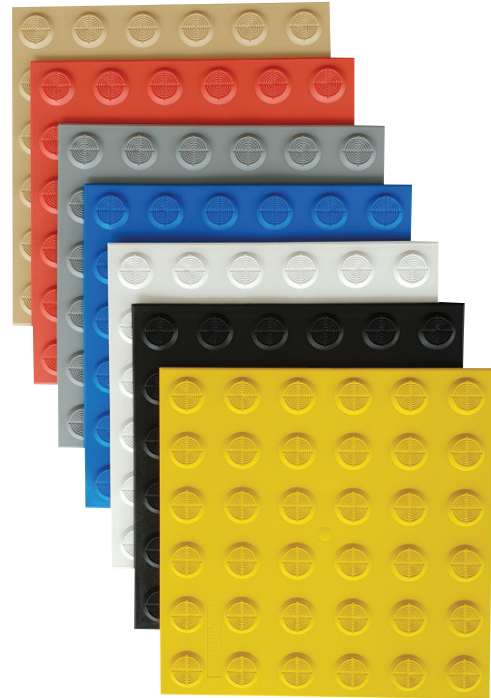

HOW TO SPECIFY

Copy the prewritten specification below and update all sections in brackets to create your project specification.

Description

Sterling Supplies Duratrac Polymeric Tactile Hazard Tiles in (specify colour), code (specify code). To be installed in accordance to the manufacturer's instructions in accordance to the AS/NZS 1248.1.4.2009.

Manufacturer

Sterling Supplies
 P: 1800 621 103
 E: sales@sterlingsupplies.com.au
 W: www.sterlingsupplies.com.au

